


# **ZIRCON AAR APPROVED GRAPHITE LUBRICANTS**

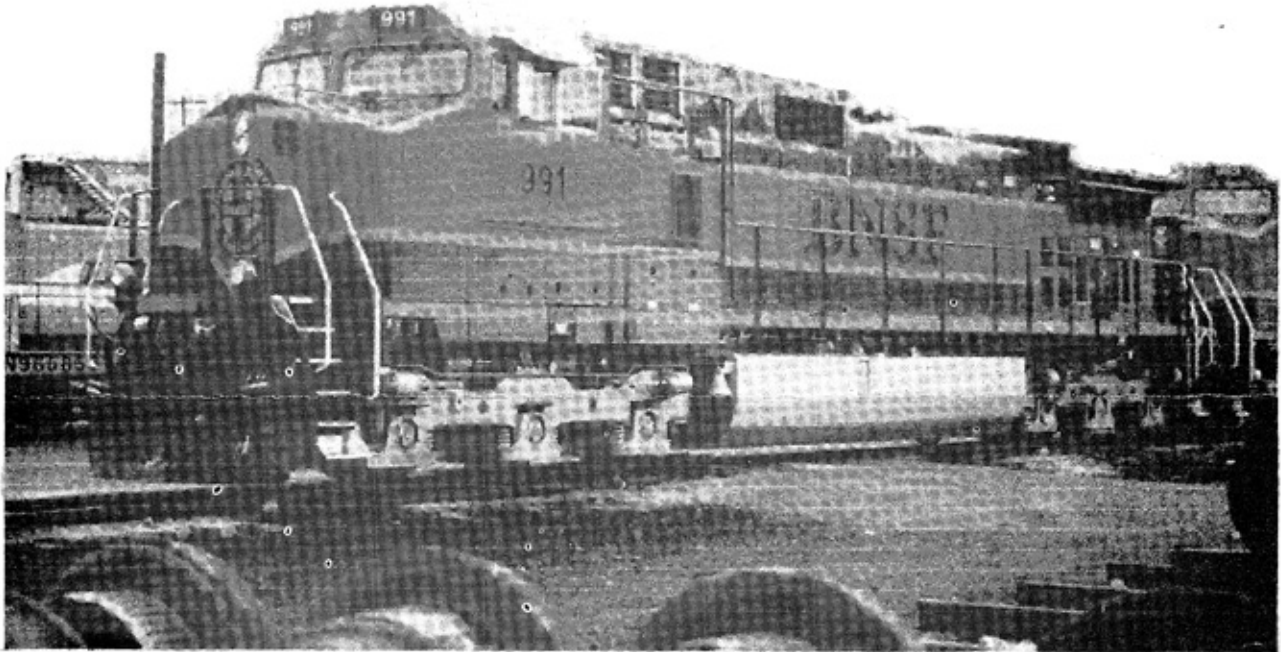

## **ZIRCON'S PROCESSED GRAPHITE DRY FILM LUBRICANT**

1. Air dries rapidly and adheres "tenaciously" to surfaces with a minimum preparation of prepping surfaces.
2. Thinness of the coating, coupled with "High Lubricity" provides long wearing lubrication without redesign of component dimensions or reapplication.
3. Fast curing time creates a lubricity that resists "metal to metal" erosion and provides a lubricant that has tested to 24,000 cycles without deterioration of wear.

\*Institute For Research, Inc., Houston, TX 2/14/95

## **AREAS OF APPLICATION**

- Autorack Equipment-Chains, Tracks, Tie-Down Chalks, Hinges, Switches, Couplings, etc.
- Internal Combustion engine components (Assembly and Break-in)
- Automotive & Industrial Gaskets
- Thread lubricant (anti-seize)
- All metal to metal wear

**AMERICAN RAILROAD ASSOCIATION APPROVAL SPECIFICATION M-971-93**